

NorthStar 26.5 LPM 12/24V Diaphragm Pump

This high-end NorthStar® NSQ Series™ 12/24V pump upgrades your sprayer with innovative components and engineering for superior spot or broadcast spraying performance and quick-connect convenience. Delivers 100% continuous duty rating with no cool down period required. Compatible with Roundup® agricultural herbicide.

Model Numbers:

NTE#: 2687062 (QC - 12V) NTE#: 2687064 (QC - 24V)
NTE#: 2687061 (NPT - 12V) NTE#: 2687063 (NPT - 24V)

Voltage:

12V or 24V DC

Maximum Flow Rate:

26.5 liters/minute (7.0 gallons/minute)

Pressure Switch:

Shut-Off: Factory set at 60 PSI \pm 2 PSI (4.1 \pm 0.14 BAR)
Hysteresis: Varies with outlet conditions
11 PSI \pm 3 PSI at minimum on/off cycling
6 PSI \pm 2 PSI at maximum on/off cycling

Wetted Materials:

Plastics: Polypropylene, Nylon (PA66)
Diaphragm: Santoprene
Valves/Seals: Viton
Check Valve Spring: 304 stainless steel

Liquid Temperature:

60° C (140° F) maximum

Prime:

Self-priming up to 3.65m (12-ft.)

Ports:

19mm (3/4in.) Quick-Connect or 13mm (1/2in.) NPT

Weight:

4.31 kg (9.5 lbs)

Duty Rating:


Continuous (S1)

Protection Rating:

IPX1


Approvals:

CE compliant

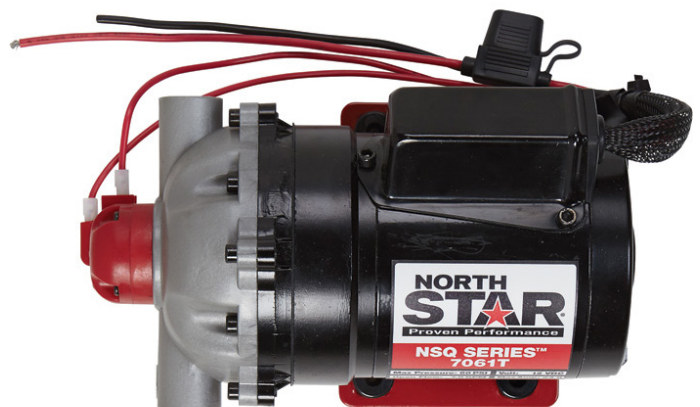


NorthStar 26.5 LPM 12/24V Diaphragm Pump

Dimensions:

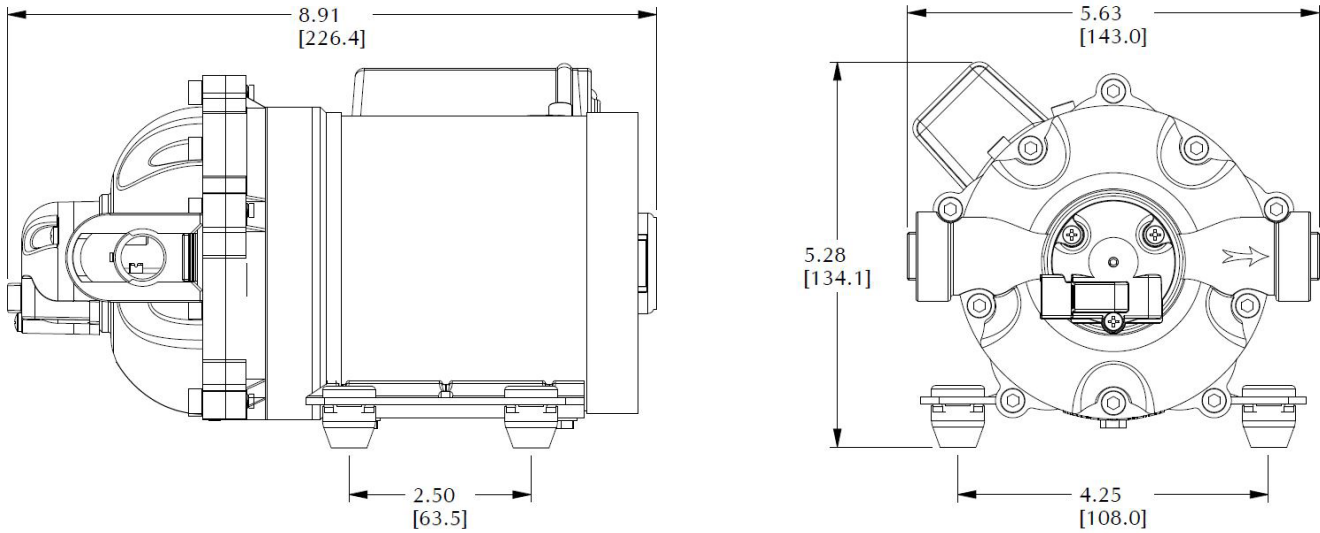

Performance at 12V DC:

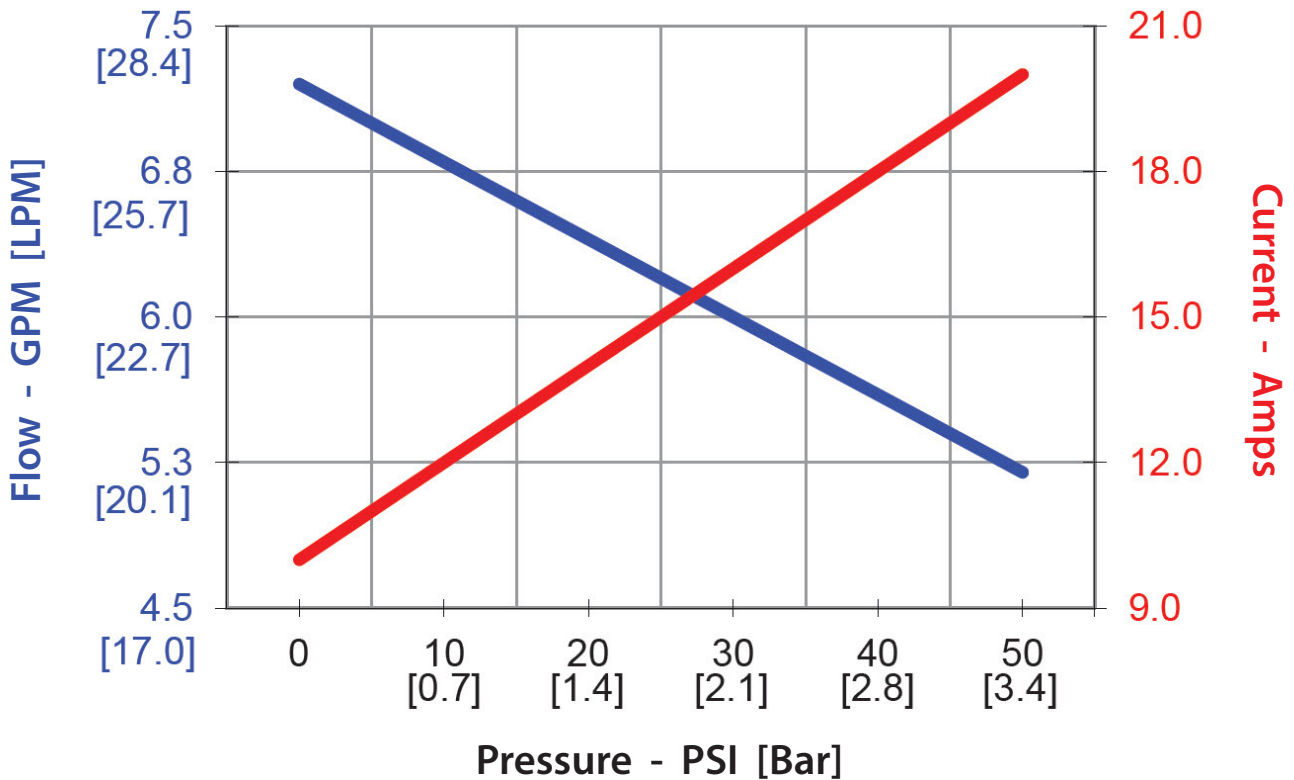

*Specifications subject to change without notice.